




# Available Models

Model	Max Delivery Pressure (PSIG)	Max Flow (MCFD)	Drive HP	High Press Switch Setting (PSIG)	Low Press Switch Setting	High Temp Setting °F (°C)	Oil Thermal Bypass Valve Setpoint °F (°C)	Gas Bypass Valve	Module Weight (Lbs.)
<b>Single Scroll Units</b>									
SZO22C3A-EDE-234	125	100	10	215	2" W.C. (5 mbarg)	240 (116)	200	YES	350
SZV22C1A-EDE-140	190	100	15	215	2" W.C. (5 mbarg)	280 (138)	250	NO	356
<b>Dual Scroll Units</b>									
SZO56C1A-EDE-110	150	260	30	215	0.75 PSIG (52 mbarg)	240 (116)	200	NO	625
SZO44C1A-EDE-140	190	200	30	215	0.75 PSIG (52 mbarg)	240 (116)	200	NO	625
SZO44C1A-EDE-244	190	200	30	215	0.75 PSIG (52 mbarg)	240 (116)	200	YES	625
SZV44C1A-EDE-140	190	200	30	215	0.75 PSIG (52 mbarg)	280 (138)	250	NO	625
SZV32C1A-EDE-150	275	150	30	290	0.75 PSIG (52 mbarg)	280 (138)	250	NO	625

Figure 2 : Copeland Scroll® Single and Dual Compressor Modules.

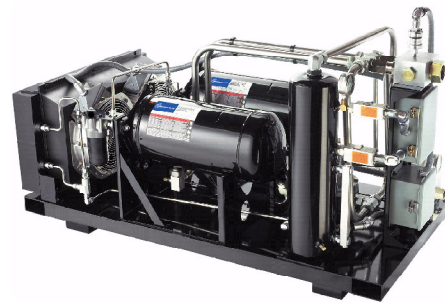



# Operating Pressures & Gas Flows

